

SALES, RENTAL & MANUFACTURERS OF **ALUMINIUM SCAFFOLDINGS** ALUMINIUM & FRP LADDERS

● 985-985-7100, 985-985-7400, 985-985-7500

✉ info@msafegroup.com

🌐 www.msafegroup.com



PAN INDIA:

Delhi-NCR, Kolkata, Nagpur, Indore, Mumbai, Pune, Ahmedabad, Goa, Bangalore, Chennai, Hyderabad, Vizag, Bhubaneswar, Guwahati



ALUMINIUM SCAFFOLDING ADVANTAGES



LIGHT WEIGHT
TOOL FREE
INSTALLATION



QUICK & EASY
ASSEMBLY



HIGH STRENGTH
SYSTEMS



HIGHLY VERSATILE



HIGH DURABILITY
6005/6063 AEROSPACE GRADE
ALUMINIUM ALLOY

- Msafe Fit believes in making safety as inherent part of the products and service to prevent accident/hazards at work place.
- Msafe Fit scaffolds are build by high grade aluminium alloys and use superior welding technology gas Tungsten Arc Welding which give safety durability and strength to product of high standards.
- Team led by professional, rendering quality products, services and readily always available to solve the customer needs.
- Our QMS (Quality Management System) is certified with ISO 9001-2015 and company ensures high quality products which comply with EN 1004 standard and offer CE Certified products.



Tool Free Assembly

From adjustable legs to toe boards, no tools are required to build a tower; brace hooks snap into position with a large contact area to give a firm grip. Frames use interlock clips and outriggers are secured with clamps.




Color-Coded Braces

Braces have a coloured ring at each end for quick identification and faster assembly.



Enhanced Frame Design Features

Our frames come with a center patti and sturdy leg supports for added stability. Additionally, our steps are flared, not welded, ensuring durability and safety.



Custom Access Solutions

Our engineering and design team offers fast, efficient and safe solutions to various kind of access problems with customized solutions.



Fluted Frame Rungs

Provides better grip and increases slip resistance while climbing frames

Higher Safety & Durability

Highest Rental Aluminium Scaffold in India (100 Feet+)

MSAFE FIT

STAIRWAY SCAFFOLDING (MST) (1.35m x 1.8m)

MSafe Fit Stairway version is a safe, comfortable modular mobile scaffold tower to reach the work area for frequent climbing and descent.



MST034



MST054



MST094

STANDARD FEATURES

- Scaffolding width: 1.35 m, length: 1.80 m.
- Working heights can be extended from 4.4 m to max 18.4 m with standard parts.
- Comfortable entry into the scaffolding from outside through the wide entry frame.
- Anti-slip stairway steps.
- 200 kg/m² loading capacity i.e. depending on platform size from 480 kg to max 810 kg.
- The free standing height for scaffold is 12.4m indoors and 8.4m outdoors as per safety norms.

Scaffold Size 1.35m X 1.8m

Model No.	MST034	MST045	MST054	MST065	MST074	MST085	MST094	MST105	MST114	MST125	MST134	MST145	MST154	MST165	MST174
Working Height (m)	4.4	5.5	6.4	7.5	8.4	9.5	10.4	11.5	12.4	13.5	14.4	15.5	16.4	17.5	18.4
Tower Height (m)	3.4	4.5	5.4	6.5	7.4	8.5	9.4	10.5	11.4	12.5	13.4	14.5	15.4	16.5	17.4
Platform Height (m)	2.4	3.5	4.4	5.5	6.4	7.5	8.4	9.5	10.4	11.5	12.4	13.5	14.4	15.5	16.4



Entry Frame (1.35m) (H-2m)



Push on Frame (1.35m) (H-2m)



Stairway (1.8)

MSAFE FIT NARROW SCAFFOLDING (MN) (0.75m x 1.8m)

MSafe Fit Narrow version is a safe, comfortable mobile scaffold tower, It can be used to reach narrow and difficult work places.



MN022



MN032



MN052

STANDARD FEATURES

- Scaffolding width :0.75m, Length :1.80 m.
- Working height can be extended from 4.2 m to max. 13.5m.
- 200 kg / m² loading capacity, i.e. depending on platform size from 270 kg to max 810 kg.
- The free standing height for scaffold is 12.3 m indoor and 8.3 m outdoor as per safety norms.
- Monkey climbing arrangements.

Scaffold Size 0.75m X 1.8m

Model No.	MN022	MN026	MN028	MN032	MN043	MN052	MN063	MN074	MN085	MN094	MN105	MN114	MN125
Working Height (m)	3.2	3.6	4.2	4.2	5.3	6.2	7.3	8.2	9.3	10.2	11.3	12.2	13.3
Tower Height (m)	2.2	2.6	2.8	3.2	4.3	5.2	6.3	7.2	8.3	9.2	10.3	11.2	12.3
Platform Height (m)	1.2	1.6	2.2	2.2	3.3	4.2	5.3	6.2	7.3	8.2	9.3	10.2	11.3



Trapdoor Platform



Guard Rail



Push on Frame (0.75m) (H-2m)

MSAFE FIT

WITHOUT STAIRWAY SCAFFOLDING (MWS) (1.35m x 1.80m)

Scaffold Width : 1.35m, Length : 1.80m

Rung Spacing: 280mm

STANDARD FEATURES

- Working height can be extended from 4.2 m to max 15.5 m with standard parts.
- 200kg/m² loading capacity.
- Monkey climbing from inside the scaffolding.



MWS052



MWS063



MWS085

Scaffold Size 1.35m X 1.8m

Model No.	MWS022	MWS032	MWS043	MWS052	MWS063	MWS074	MWS085	MWS094	MWS105	MWS114	MWS125	MWS134	MWS145
Working Height (m)	3.2	4.2	5.3	6.2	7.3	8.4	9.5	10.4	11.5	12.4	13.5	14.4	15.5
Tower Height (m)	2.2	3.2	4.3	5.2	6.3	7.4	8.5	9.4	10.5	11.4	12.5	13.4	14.5
Platform Height (m)	1.2	2.2	3.3	4.2	5.3	6.4	7.5	8.4	9.5	10.4	11.5	12.4	13.5



150mm Fixed Regular Wheel



200mm Fixed Wheel



200mm Adjustable Wheel



Base plate/Jack

MSAFE FIT ECO Z - TYPE (WITH 4 RUNG FRAME)

Scaffolding Width : 1.35 m
 Scaffolding Length : 1.80 m
 Rung Spacing : 560 mm
 Working Load : 200 kg/m²
 Tower Load : 500/600 kgs

Z-Type stairway arrangement, platform at top

Scaffold Size 1.35m X 1.8m

Model No.	EMS032	EMS052	EMS072	EMS092
Working Height (m)	4.2	6.2	8.2	10.2
Tower Height (m)	3.2	5.2	7.2	9.2
Platform Height (m)	2.2	4.2	6.2	8.2



EMS092

MSAFE FIT Z- TYPE SCAFFOLD (WITH 7 RUNG FRAME)

Scaffolding Width : 1.35 m
 Scaffolding Length : 1.80 m
 Rung Spacing : 280 mm
 Working Load : 200 kg/m²
 Tower Load : 500/600 kgs

Z-Type stairway arrangement

Scaffold Size 1.35m X 1.8m

Model No.	MSZ032	MSZ043	MSZ052	MSZ063	MSZ072
Working Height (m)	4.2	5.3	6.2	7.3	8.2
Tower Height (m)	3.2	4.3	5.2	6.3	7.2
Platform Height (m)	2.2	3.3	4.2	5.3	6.2



MSZ072


Model No.	MSZ085	MSZ094	MSZ105	MSZ114	MSZ125
Working Height (m)	9.5	10.4	11.5	12.4	13.5
Tower Height (m)	8.5	9.4	10.4	11.4	12.5
Platform Height (m)	7.5	8.4	9.4	10.4	11.5

MSAFE FIT

EXTRA REACH SCAFFOLDING (MSER)

(1.35m x 1.80m)

MSafe Fit Extra reach version is a safe, modular mobile scaffold tower to reach extra height.

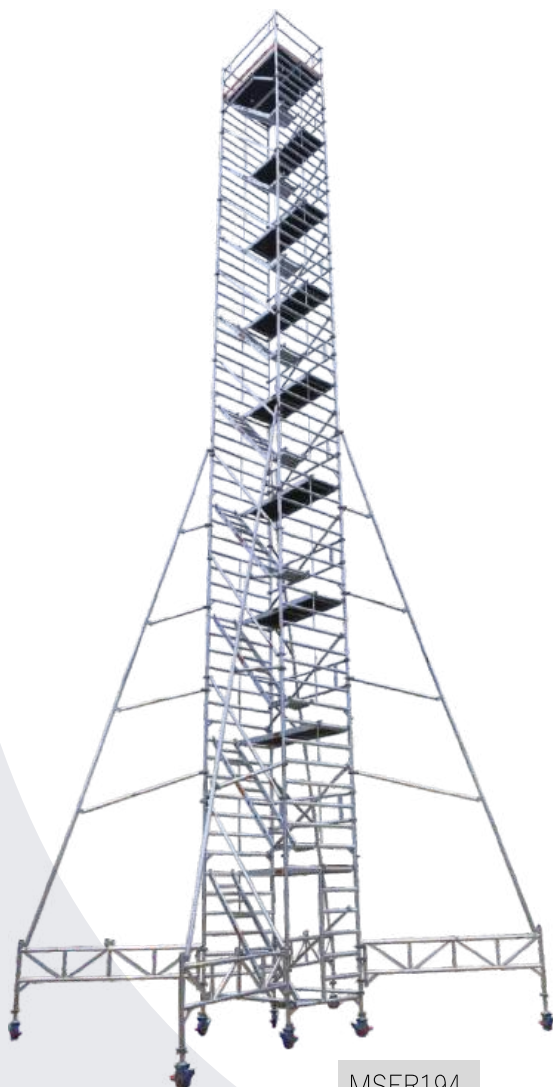

MSER194

STANDARD FEATURES

- Scaffolding width : 1.35m
- Scaffolding length : 1.80m
- Working height can be extended from 14.4m to 30.40m with standard parts.
- Comfortable entry into the scaffolding from outside through wide entry frame.
- Anti-slip stairway steps.

Scaffold Size

Model No.	MSER134	MSER145	MSER154	MSER165	MSER174	MSER185
Working Height (m)	14.4	15.5	16.4	17.5	18.4	19.5
Tower Height (m)	13.4	14.5	15.4	16.5	17.4	18.5
Platform Height (m)	12.4	13.5	14.4	15.5	16.4	17.5

Model No.	MSER194	MSER205	MSER214	MSER225	MSER234	MSER245
Working Height (m)	20.4	21.5	22.4	23.5	24.4	25.5
Tower Height (m)	19.4	20.5	21.4	22.5	23.4	24.5
Platform Height (m)	18.4	19.5	20.4	21.5	22.4	23.5

Model No.	MSER254	MSER265	MSER274	MSER285	MSER294	MSER305
Working Height (m)	26.4	27.5	28.4	29.5	30.4	31.5
Tower Height (m)	25.4	26.5	27.4	28.5	29.4	30.5
Platform Height (m)	24.4	25.5	26.4	27.5	28.4	29.5



Triangular Stabilizers



Mobile Stabilizers Frame Assy



Toe Board

MSAFE FIT PODIUM INDOOR SOLUTION (PODIUM)

- Step Platform (Podium Step) with / without Handrail
- Different working heights available for all types of work
- Easy to Assemble / Disassemble, Transport & Store
- Step Distance : 300mm
- Material : Aluminium Alloy 6063-T6
- Anti-Slip Wooden Platform : 12 mm thick film faced plywood

Podium Size 1.30m X 0.73m

Model No.	MPP225	MPP285	MPP315	MPP350
Working height (m)	3.25	3.85	4.15	4.50
Tower height (m)	2.25	2.85	3.15	3.50
Platform height (m)	1.25	1.85	2.15	2.50



MSAFE SPECIAL MAPS (BRIDGE SECTION)

Bridge Section	
Width Size	2.5 m
	3.0 m
	3.8 m
	4.2 m
	4.8 m
	5.4 m
	6.0 m



Bridge Section

Msafe Fit Aluminium Scaffold Platform can be easily used for a variety of specialized solutions like for specific applications to work over machines or obstructions, combination of two mobile access platform with connecting bridges provides a solution to reach height above machines, or any other obstructions at project sites. This allows multiple activities to continue below the bridge.

MSAFE SPECIAL MAPS (CANTILEVER)

A cantilever section can be added in order to provide extra working area. This provides 0.75 m/1.35m extra horizontal reach - ideal for reaching up and over machines or other obstructions while reaching heights

1.35 mtr Cantilever
One Side

*Our team is ready to provide
many other configurations for
customized applications
as per your need.*

0.75 mtr Cantilever
Both Side

NOTE: Use of counter weight is mandatory while using cantilever.

*Use scaffold as per instruction manual only.

ALUMINIUM LADDER .

HULK LADDER (MHL)

- Light weight, versatile and compact.
- Can be used on stairs
- Standard Ladder outside width : 420 mm & pitch: 280 mm.



Platform with Handrail



Hulk Ladder



Heavy Duty A-Type



Light Duty



Straight Ladder

Specifications

Model No	MHL 6	MHL 8	MHL 10	MHL 12
Working height (ft)	12	14	16	18
Platform height (ft)	6	8	10	12

HEAVY DUTY A-TYPE LADDER (MAL)

Specifications

Model No	MAL 6	MAL 8	MAL 10	MAL 12
Working height (ft)	10	12	14	16
Platform height (ft)	6	8	10	12

STRAIGHT LADDER (MSL)

Specifications

Model No	MSL 6	MSL 8	MSL 10	MSL 12
Working height (ft)	10	12	14	16
Platform height (ft)	6	8	10	12

FRP LADDER

FRP PLATFORM LADDER

Specifications				
Model No	MFPL4	MFPL6	MFPL8	MFPL10
Working height (ft)	10	12	14	16
Ladder height (ft)	6	8	10	12
Platform height (ft)	4	6	8	10



FRP Platform Ladder

FRP A TYPE LADDER

Specifications					
Model No	MFSL4	MFSL6	MFSL8	MFSL10	MFSL12
Working height (ft)	8	10	12	14	16
Platform height (ft)	4	6	8	10	12




FRP A Type ladder



FRP Mega Cage Platform

FRP MEGA CAGE PLATFORM

Specifications								
Model No	MFML4	MFML5	MFML6	MFML7	MFML8	MFML9	MFML10	MFML11
Working height (ft)	10	11	12	13	14	15	16	17
Ladder height (ft)	7	8	9	10	11	12	13	14
Platform height (ft)	4	5	6	7	8	9	10	11

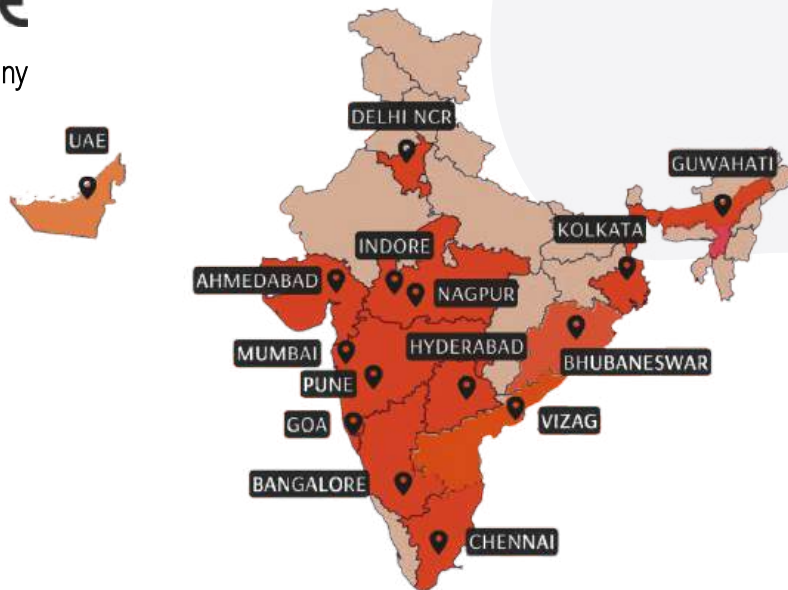

OUR LOCATIONS/YARDS

NORTH

Delhi-NCR

Regd. Office: C-186, Vivek Vihar, New Delhi, Delhi - 110095

Corporate Office: C 108, Sector 2, Noida, Uttar Pradesh, Noida, Uttar Pradesh – 201301

Factory: G – 103, Site 5, Kasna Rd, Industrial Area, Greater Noida, Uttar Pradesh – 201306

K-446, Industrial Unit, Surajpur Site V Upsida, Industrial Area, Noida, Gautam Buddha Nagar, Uttar Pradesh 201306

EAST

Kolkata

Basai Col Dam, LR Dag No 2761/2762, LRKhaitan
No 4552, Uttarpara, Dist-Hoogly, West Bengal,
Kolkata, West Bengal – 712234

Bhubaneswar

D-2/9, ZONE-D, MANCHESWAR INDUSTRIAL
AREA, PO RASULGARH, Sector A,
Bhubaneswar, Khordha, Odisha, 751010

Guwahati

Ground Floor, Patta No 91 Old/147
New, Boragaon. Mouza Bettola,
Rvenue Village, Guwahati, Kamrup
Metropolitan, Assam 781035

WEST

Mumbai

Office No. 303, 3rd Floor, Gundecha
Industrial Complex, Near Growel's Malli
Kandiwali East, Mumbai, Maharashtra 400101

Yard: Shop no: A-3, Rhytham Developers, Usatane
Village, Kalyan East, Thane, Maharashtra 421306

Indore

Plot No 78-79, Ram Ratan Colony,
Pithampura, Dhar, Madhya Pradesh, Madhya
Pradesh 454774

Ahmedabad

Godown No-5, Sur No 191+192+193+194+195/1,
Palki Bagba Green, Opposite Narimanpura Gam
Dhokla Road, Fatevadi, Ahmedabad, Gujarat 382210

Nagpur

Godown No: 7, ground floor, Khadgoan
Road, Dattawadi, Nagpur,
Maharashtra-440023

Pune

Gat Number 143, Chimbali Phata,
Mauje Kuruli, Chakan, Mauli Ware House
Pune Nashik Road, Opposite Om Logistic
Kuruli, Pune, Maharashtra 410501

SOUTH

Chennai

S/No. 102/3A2, Vasanthapuri-I., Malayam Bakkam,
Thiruvallur, Chennai, Tamil Nadu, 600123

Bangalore

Site No: 3260, 1st Block, Sir MV Layout
Bangaluru, Karnataka - 560056

Hyderabad

Door No. 7-3145/3/32, Zone-4, Sub Zone B,
Situated at Gagan Pahad,, Katedhan Ranga
Reddy Dist, Hyderabad, Telangana 500052

VISAKHAPATNAM

7-10-41/1, Panthulugari Meda Gajuwaka,
Visakhapatnam, Andhra Pradesh 530026

Goa

Godown No: G-10, Saurabh Appt,
Dhawli, Ponda, Goa-403401

UAE

UAE

203, Al Bahar Building, Al Khabeesi, Deira, Dubai

