


MSAFE
PROTECT THE PEOPLE
STEELSAFE
STRENGTH AND SAFETY
MANUFACTURING - SALES - RENTAL
“Next Level MS Scaffolding Partner”
- MS Scaffolding
- MS Shuttering
- Accessories
www.steelsafe.co.in

MS SCAFFOLDING

STEELSAF
STRENGTH AND SAFETY

Cuplock / Vertical / Standard

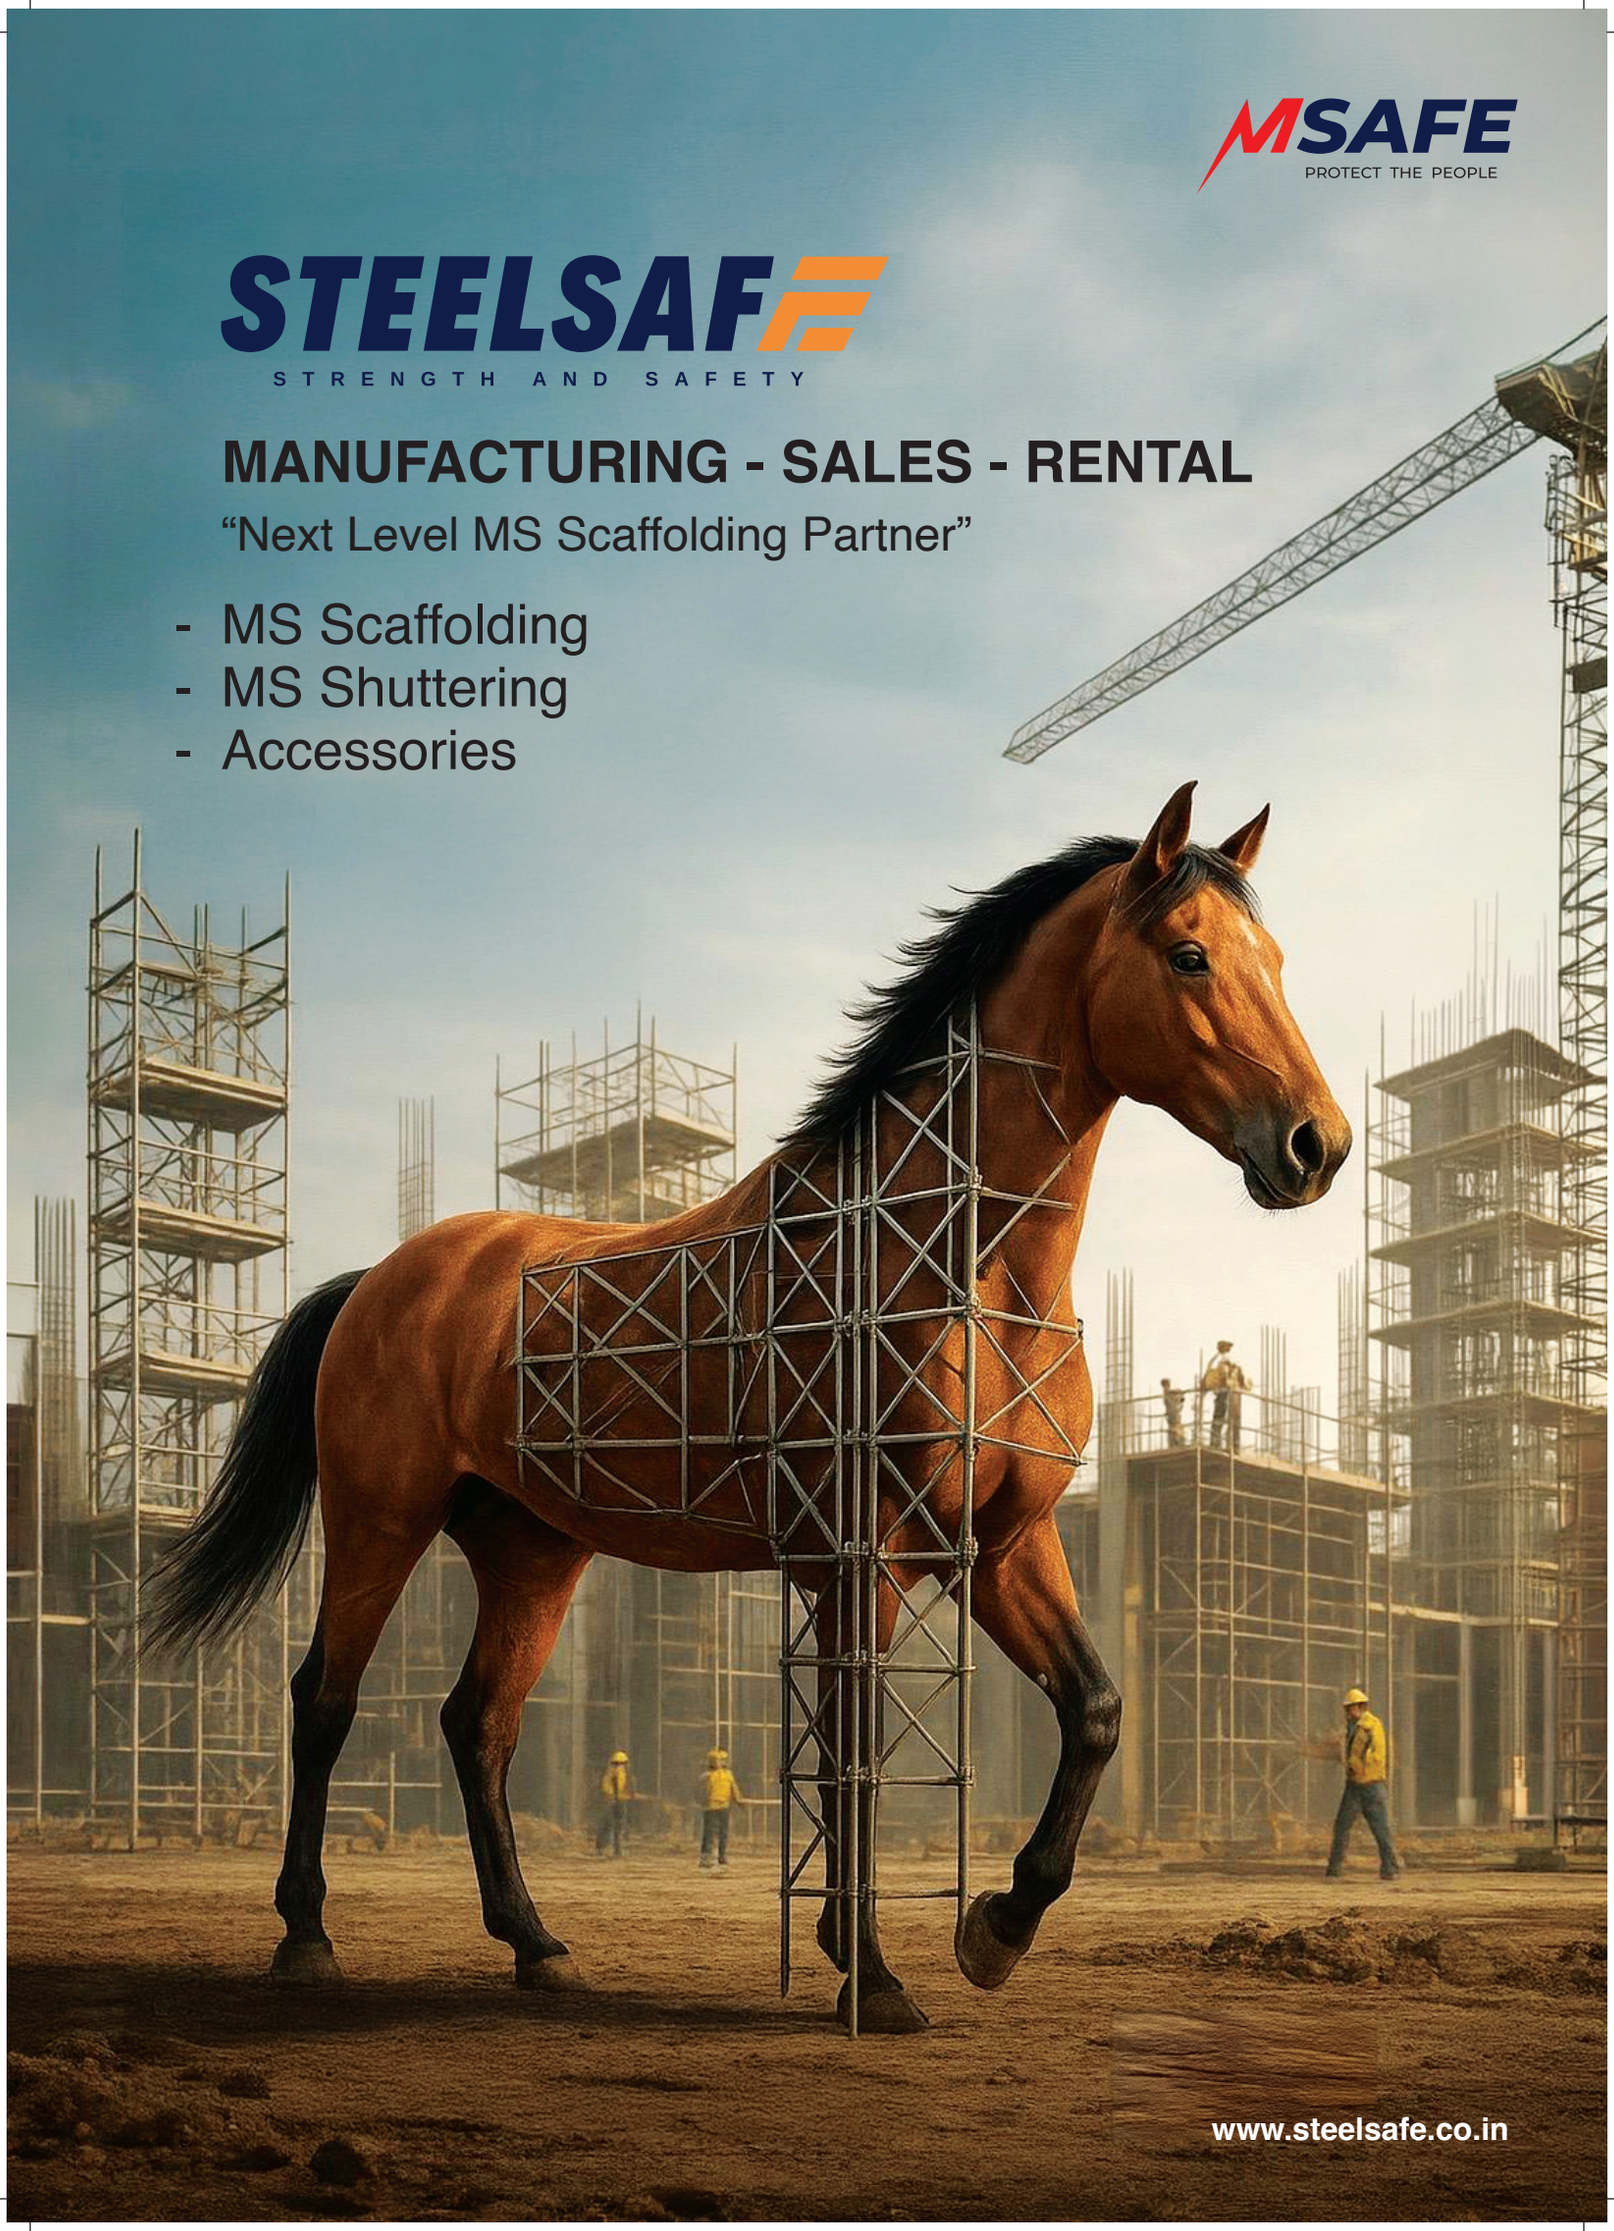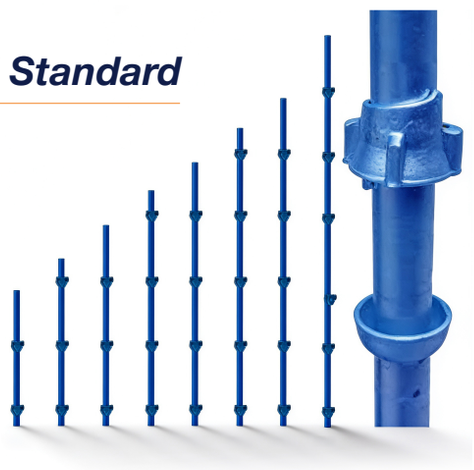


Thickness : 3mm / 3.2mm / 4mm
OD : 48.3 mm
Color : Oxford Blue (Dip)
Material : ISI Marked Pipe

Sizes	Weight
3 m (6 CUP)	13.2 kgs
2.5 m (5 CUP)	11 kgs
2 m (4 CUP)	9 kgs
1.5 m (3 CUP)	7 kgs
1 m (2 CUP)	5 kgs
0.5 m (1 CUP)	3 kgs

Vertical with socket is also available as an optional


Ledger / Horizontal

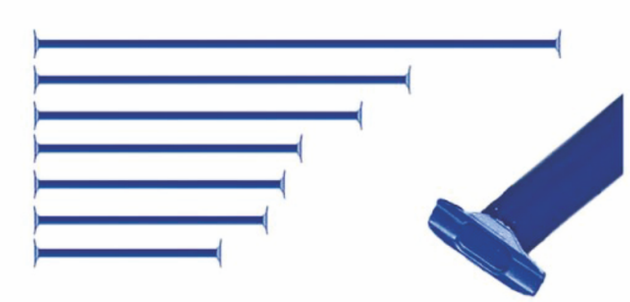

Thickness : 3mm / 3.2mm / 4mm
OD : 48.3 mm
Color : Oxford Blue (Dip)
Material : ISI Marked Pipe

Sizes	Weight / Pc
0.915 m	3.5 kgs
1 m (950 mm)	3.8 kgs
1.2 m (1150 mm)	4 kgs
1.5 m (1450 mm)	5 kgs
1.8 m (1750 mm)	6 kgs
2 m (1950 mm)	6.6 kgs

Walkway Planks

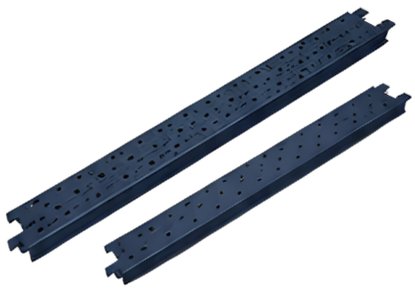

Standard Sizes

Sizes	Thickness
1000 x 225 mm	1.6 / 2 mm
1200 x 225 mm	1.6 / 2 mm
1500 x 225 mm	1.6 / 2 mm
1800 x 225 mm	1.6 / 2 mm
2000 x 225 mm	1.6 / 2 mm

Available with Hook & without Hook
Can be customized as per requirement

Spigot / Joint Pin



Standard Sizes
300 mm / 250 mm
OD : 38 mm

Base Jack / U Jack




Standard Sizes
450 mm / 600 mm
OD : 32 mm / 36 mm / 38 mm

MS SCAFFOLDING

STEELSAF
STRENGTH AND SAFETY

MS Chali (Grating)

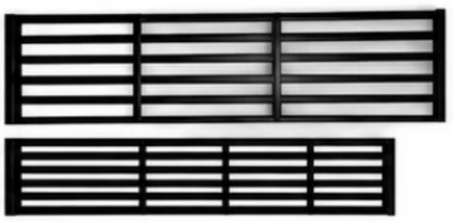


Standard Sizes

Sizes
1800 x 300
2000 x 300
2200 x 300

Square Tube of 25 x 25 x 1.6 mm &
20 x 20 x 1.6 mm
Can be customized as per requirement

Toe Guard

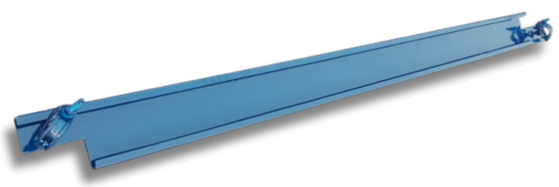


Standard Sizes

Thickness : 1.6 mm / 2 mm

Sizes
1000 x 150 mm
1200 x 150 mm
1500 x 150 mm
1800 x 150 mm
2000 x 150 mm

Adjustable Prop Jack

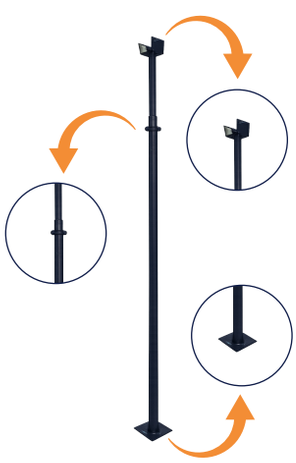

Specification

Prop Outer : 60 OD
Prop Inner : 48.3 OD
Thickness : 3.2 mm

Standard Sizes

Sizes	Weight
2 x 2 m	17.5 kgs
2 x 3 m	20.5 kgs
3 x 2 m	25 kgs

Prop Sleeve



G-Pin




Prop Nut with Handle



Ringlock System

STEELSAF
STRENGTH AND SAFETY

Ringlock Standard Vertical

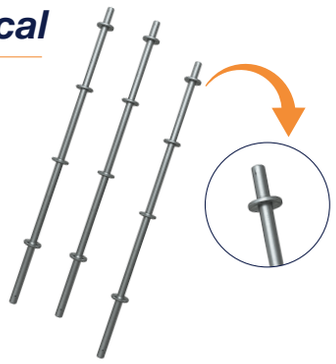

Thickness : 3mm / 3.2mm / 4mm
OD : 48.3 mm
Color : Finished Zinc Plated/GI
Material : ISI Marked Pipe

Sizes	Weight / Pc
0.5 m	2.1 kgs
1 m	4.2 kgs
1.5 m	6.3 kgs
2 m	8.5 kgs
2.5 m	10.5 kgs
3 m	12.5 kgs

Ringlock Ledger Vertical



Thickness : 3mm / 3.2mm / 4mm
OD : 48.3 mm
Color : Finished Zinc Plated/GI
Material : ISI Marked Pipe

Sizes	Weight / Pc
1 m	4 kgs
1.2 m	4.5 kgs
1.5 m	5.5 kgs
2 m	7 kgs

Diagonal Bracing



Thickness : 3mm / 3.2mm / 4mm
OD : 48.3 mm
Color : Finished Zinc Plated/GI
Material : ISI Marked Pipe

Ringlock System


Wedge



Rosset



Ledger End



Brace End



MS SCAFFOLDING ACCESSORIES

STEELSAF
STRENGTH AND SAFETY

Forge Fixed Clamp



Weight
950 grams

Sheet Fixed Clamp



Weight
600 grams

Forged Swivel Clamp



Weight
1050 grams

Sheet Swivel Clamp



Weight
650 grams

Beam Clamp



Weight
1350 grams

Ladder Clamp



Weight
1100 grams

Half Clamp



Weight
500 grams

BRC Clamp



Weight
550 grams

Sleeve Clamp



Weight
800 grams

Put Log Clamp



Weight
500 grams

Tie Road



Standara Sizes
Length : 1m/2m/3m/6m
OD : 16 mm

Adjustable Wheel



Sizes
150 mm / 250 mm

Shikanja



Sizes	Weight
2 ft	950 grams
2.5 ft	1150 grams
3 ft	1350 grams
4 ft	1500 grams

Anchor Nut



Sizes	Weight
2 Wings - 90 mm Diameter	320 grams
2 Wings - 90 mm Diameter	480 grams
3 Wings - 130 mm Diameter	750 grams
3 Wings - 130 mm Diameter	950 grams

ALUMINIUM STRAIGHT LADDER

STEELSAFE
STRENGTH AND SAFETY



Straight Ladder with Handrail

Thickness : 2 mm
Steps : D Rungs
Outer Width : 350 mm

Specifications	Details
Material	Aluminium
Side Rail	66 x 31 x 2 mm
Rung	40 x 30 1.5 mm (Aluminium)
Rung Spacing	300 mm
Width	350 mm
Finish	Raw
Load Capacity (Max.)	150 kg



Straight Ladder without Handrail

Thickness : 2 mm
Steps : D Rungs
Outer Width : 350 mm

Specifications	Details
Material	Aluminium
Side Rail	66 x 31 x 2 mm
Rung	40 x 30 1.5 mm (Aluminium)
Rung Spacing	300 mm
Width	350 mm
Finish	Raw
Load Capacity (Max.)	150 kg


M70 FORMWORK BEAMS

**ENGINEERING FOR STRENGTH.
BUILT FOR REUSE.**

M70 Formwork Beams - Plus are enginered to deliver superior load bearing capacity, long term durability and exceptional performance across all formwork applications.

STEEL TIMBER
BY *STEELSAFE*

REPLACE YOUR
WOODEN BATTEN

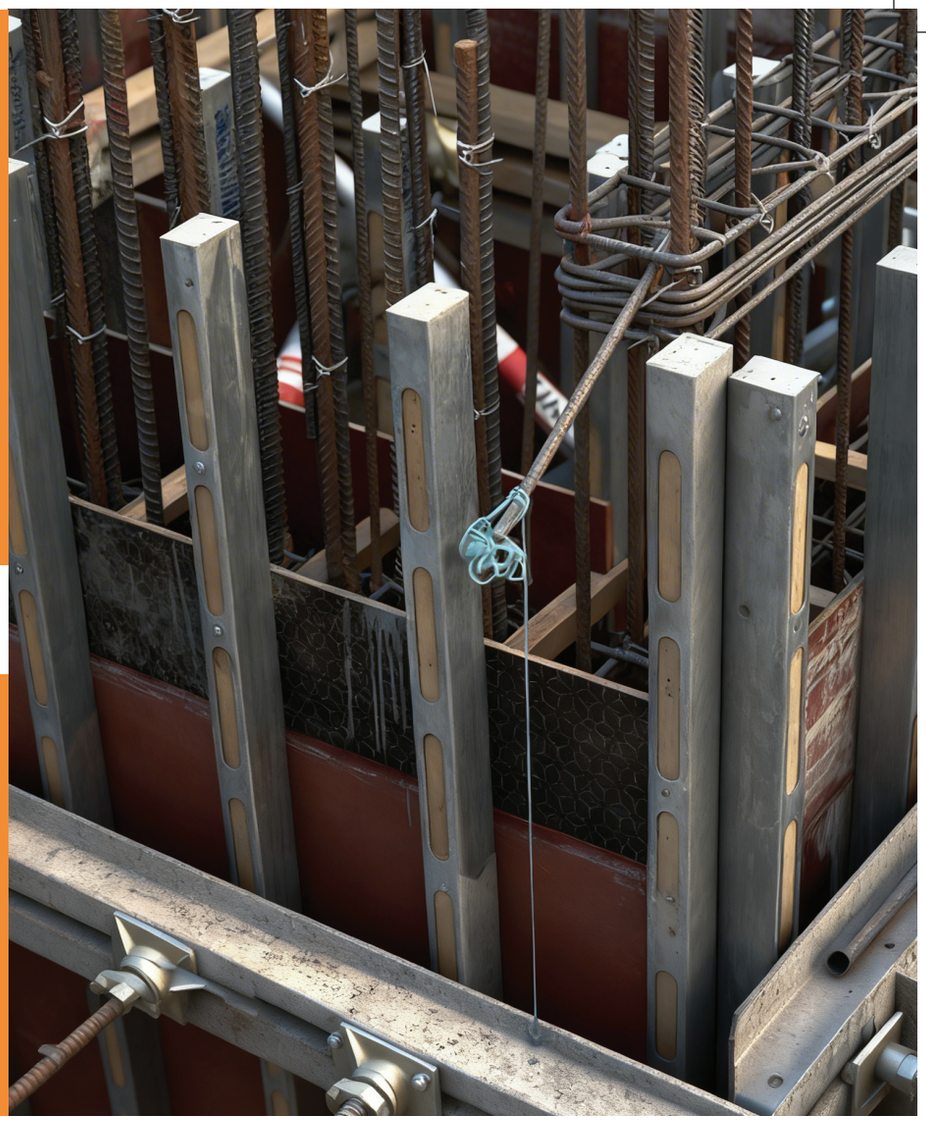

ITALIAN TECHNOLOGY
Precision engineered using advanced Italian technology

SOLID CORE CONSTRUCTION
Solid core construction with no internal gaps


HIGH STRENGTH & DURABILITY
Designed for high strength and long life


EXCELLENT REUSE VALUE
High durability with excellent reuse value

LOW MOISTURE CONTENT
Moisture content below 5%

HIGH DENSITY
High density (~600-700 kg/m?) for superior performance

APPLICATION AREAS


SLABS


WALLS


COLUMNS

PHYSICAL PROPERTIES

Ultimate Moment Capacity	3.5 kN-m
Ultimate Shear Strength	8.0 kN

AVAILABLE SIZES
- 70 X 50 mm
- 50 x 50 mm

AVAILABLE SURFACE FINISH
Pre Galvanised

SPECIFICATIONS OF STEEL TIMBER

PRE-GALVANISED IRON PIPE
Pre galvanised YST 210 Rectangular Pipes with 2mm thickness provide higher strength to the product.

SOLID CORE CONSTRUCTION
No internal voids ensures maximum strength, consistent performance and higher load bearing capacity.

CUSTOM SIZES AVAILABLE
We can develop the custom sizes according to your requirement

STEELSAFE
STRENGTH AND SAFETY



ELECTRICAL RESEARCH AND DEVELOPMENT ASSOCIATION

Our Locations / Yards

NORTH

Delhi-NCR,
Regd. Office: C-186, Vivek Vihar, Phase - 1, Jhilmil, Delhi - 110095.

Corporate Office: A-57, 7th Floor, Let's Connect Business Park, Sector-136 Noida - 201301

Factory: 384 - 385, KASNA Ecotech Extension, Greater Noida, Gautam Buddha Nagar, Uttar Pradesh - 201310

Factory: K-446, Industrial Unit, Surajpur Site V Upsida, Industrial Area, Noida, Gautam Buddha Nagar, Uttar Pradesh 201306

Lucknow : Plot No 11 Kh No 3533, Sarojini Nagar, Gindan Khera.

Punjab : Om Ji Complex, 0-I Complex Godown Area Bhabat Bhabat Zirakpur, Punjab – 140603

Jaipur : 19, Shree Dev Nagar, Harmada, Jaipur, Rajasthan, 302013

EAST

Kolkata : J L No. 96, R.S KH No.219, L.R.KH No. 2-414-1, Moza Kharial PS Coalcomlx Santra Para Kharial, Dakuni, Hooghly, West Bengal - 712311

Bhubaneswar : Plot No. 462 / 533 / 853, Khata No. 290, PS Chandaka, Bhagabatipur, Dist Khordha, Bhubaneswar, Orissa - 752054

Guwahati : Ground Floor, Patta No 91 Old/147 New, Boragaon. Mouza Bettola, Revenue Village, Guwahati, Kamrup Metropolitan, Assam 781035

WEST

Mumbai :
Office: No.28, Bluerose Industrial Estate Western Express Highway Borivali East, Mumbai 400066
Yard: Shop no: A-3, Rhytham Developers, Usatane Village, Kalyan East, Thane, Maharashtra 421306

Pune : Mauli Warehouse, Gate No. 143, Opp Om Logistics, Pune - Nashik Road, Chimbali, Chimbali Phata, Mauje Kuruli, Chakan, Pune, Maharashtra - 410501

Ahmedabad : 5 Sur No. 191, 192, 193, 194, 195/1, Paiki Bagba Green, Opp. Narimanpuragam, Dholka Road, Fatehvadi, Ahmedabad, Gujarat - 382210

Nagpur : Godown No. 7, Ground Floor, H. No. 2915,Ward No. 4, Sariputra Society, Vikash Nagar, Khadgoan Road, Dattawadi, Nagpur, Maharashtra - 440023

Indore : Housingh Chouraha, Pithampur, Madhya Pradesh 454775

SOUTH

Chennai :
S/No. 102/3A2, Vasanthapuri-I, Malayam Bakkam, Thiruvallur, Chennai, Tamil Nadu, 600123

Bangalore :
Site No: 3260, 1st Block, Sir MV Layout Bangaluru, Karnataka - 560056

Visakhapatnam :
7-10-41/1, Panthulugari Meda Gajuwaka,Visakhapatnam, Andhra Pradesh 530026

Hyderabad :
Ground Floor, Door No. 7-3145/3/32, Zone-4,Sub Zone B, Situated at Gagan Pahad, Katedhan Ranga, Reddy Dist, Hyderabad, Telangana 500052

Coimbatore :
SF.593/5 Kuruchi Carmel Nagar, Kurichy Madukarai, Podanur, Coimbatore,Tamil Nadu, 641021

INDIA:
+91 9667074359
info@steelsafe.co.in

www.steelsafe.co.in

21Two Designs